

Vertical Multistage  
Electric Pumps

Electropompes  
Multicellulaires Verticales

Elettropompe  
Multistadio Verticali

**e**nergy



**Sumber Tiga Jaya**  
Maximizing Performance

**caprari**  
pumping power

# **WIDE RANGE**

## **FOR OPERATING POINTS**

**e**nergy



**caprari**

**caprari**



**Ideal for | Idéales pour | Ideali per**

PROFESSIONAL AGRICULTURE

INDUSTRIES

INFRASTRUCTURE AND CONSTRUCTIONS

WATER TREATMENT

WATER SUPPLY





**energy**

## Vertical Multistage Electric Pumps

Ultra-high efficiency and reliability, versatile and suitable for many applications: these are the characteristics of the CVX ENERGY SERIES vertical multistage electric pumps. The wide CVX range includes hydraulic size capable of processing flow rates up to 90 m<sup>3</sup>/h.

The pumps are available in cast iron and AISI 304 stainless steel and full AISI 316 stainless steel versions.

Machines conform to Directive 2009/125/EC (Eco Design - ErP)

## Electropompes Multicellulaires Verticales

Très haut rendement, très haute fiabilité, polyvalentes et adaptées aux nombreuses applications: voici les caractéristiques des électropompes multicellulaires verticales CVX ENERGY.

La large gamme CVX couvre des débits jusqu'à 90 m<sup>3</sup>/h.

Les machines sont disponibles en fonte et en acier inoxydable AISI 304 ou entièrement en acier inoxydable AISI 316.


Machines conformes à la Directive 2009/125/CE (Eco Design - ErP)

## Elettropompe Multistadio Verticali

Altissima efficienza, altissima affidabilità, versatili e adatte a numerose applicazioni: sono le caratteristiche delle elettropompe multistadio verticali SERIE CVX ENERGY. L'ampia gamma CVX comprende grandezze idrauliche capaci di elaborare portate fino a 90 m<sup>3</sup>/h.

Le macchine sono disponibili in versione ghisa e acciaio inox AISI 304 e full inox AISI 316.

Macchine conformi alla Direttiva 2009/125/CE (EcoDesign - ErP)

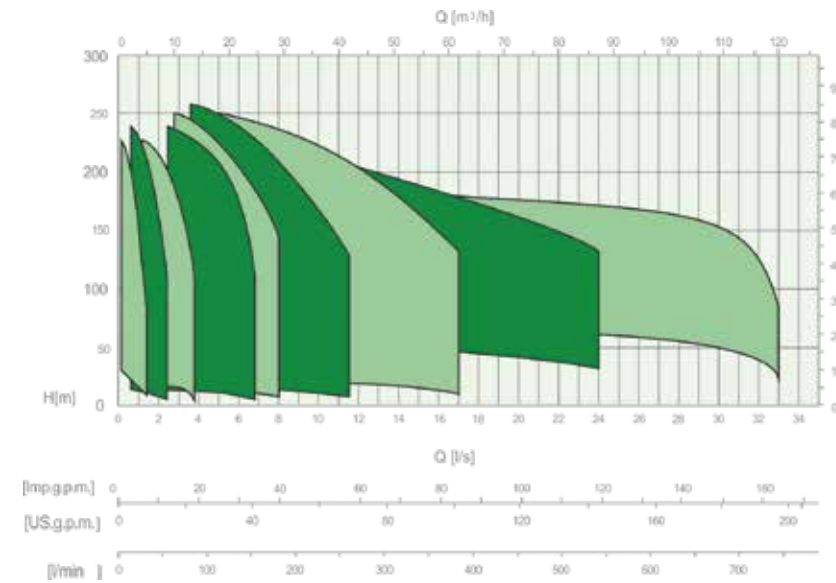

Capacity up to  
Débits jusqu'à  
Portate fino a **33 l/s**

Head up to  
Haut. de refoul jusqu'à  
Prevalenze fino a **260 m**

Power up to  
Puissances jusqu'à  
Potenze fino a **45 kW**



**FULL INOX  
UP TO CVX 321**

**INOX / CAST IRON  
UP TO CVX 901**

## DM174, WRAS, ACS

Certification for use with drinking water  
Certification pour l'emploi en eau potable  
Certificazione per l'impiego  
in acqua potabile



energy



**1** MOTOR WITH IE3 EFFICIENCY CLASS  
AS STANDARD  
Power up to 45 kW

CLASSE DE RENDEMENT MOTEUR IE3 DE SÉRIE  
Puissance jusqu'à 45 kW

MOTORE IN CLASSE DI EFFICIENZA IE3 DI SERIE  
Potenza fino a 45 kW

Available in the configuration with CapDRIVE inverter on board or wall mounted  
Disponible pour la configuration avec variateur CapDRIVE embarqué ou mural  
Disponibile configurazione con inverter CapDRIVE on board o a parete



**2** CARTRIDGE TYPE MECHANICAL SEAL (SIC/SIC)  
AS STANDARD  
Easily available on the market

GARNITURE MÉCANIQUE À CARTOUCHE (SIC/SIC) DE SÉRIE  
Facile à trouver sur le marché

TENUTA MECCANICA A CARTUCCIA (SIC/SIC) DI SERIE  
Facile reperibilità sul mercato



**3** STAINLESS STEEL FOR ALL PARTS IN CONTACT WITH THE LIQUID  
Ensure wear resistance and a long working life

TOUTES LES PIÈCES EN CONTACT AVEC LE LIQUIDE  
EN ACIER INOXYDABLE

Garantie de longue durée et de résistance à l'usure

TUTTE LE PARTI A CONTATTO CON IL LIQUIDO IN ACCIAIO INOX  
Garanzia di lunga durata e resistenza all'usura



**4** INLET/OUTLET IN LINE PORTS  
Easy installation

ORIFICES D'ASPIRATION ET REFOULEMENT EN LIGNE  
Simplicité de mise en place

BOCCHIE INGRESSO/USCITA IN LINEA  
Facilità di installazione



**5** FLOATING FLANGE FOR CONNECTION TO THE PIPES  
Simplicity of connection

BRIDES FLOTTANTES POUR LE RACCORDEMENT AUX TUYAUTERIES  
Simplicité de connexion

FLANGE FLOTTANTI PER IL COLLEGAMENTO ALLE TUBAZIONI  
Semplicità di collegamento



pumping power

Water Collection and Distribution

Wastewater Transport and Treatment

Boosting and Distribution of surface water

Pump Control Technology



**PT. Sumber Tiga Jaya**

*MAXIMIZING PERFORMANCE*

**For more information :**

Jl. Bukit Indah Lontar Rk 3 No. 36, Surabaya, Indonesia

+62 31 9914 3626

mail.support@sumbertigajaya.com

**www.sumbertigajaya.com**